




**Open End Frame
G-4064**




**Open End Frame
G-4055B**




**Open End Frame
G-405**




**Open End Frame
G-3055A**




**Light Frame
G-2617SN**




**Light Frame
G-6117SN**




**Ladder End Frame
G-404L**




**Ladder End Frame
G-403 L**

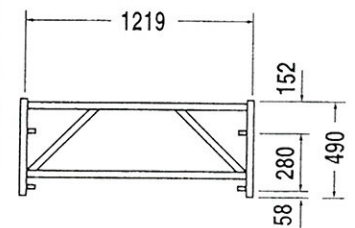


**Ladder End Frame
G-417**




**Horizontal Frame
G-8040**




**Horizontal Frame
G-8030**

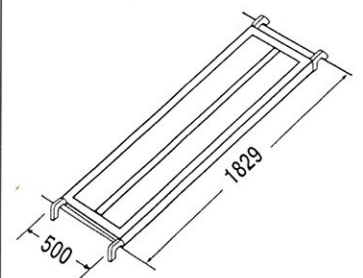


Cat-Walk Steel Plate (Plank)

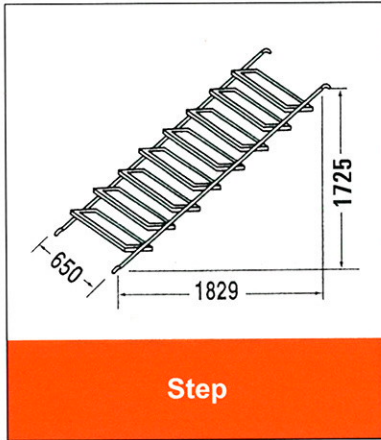


Step

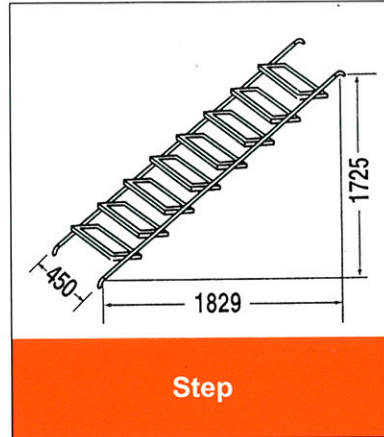


Step

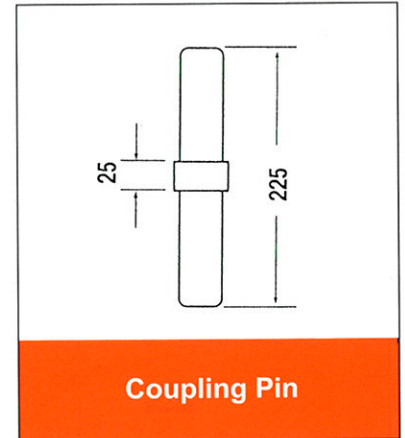


Coupling Pin

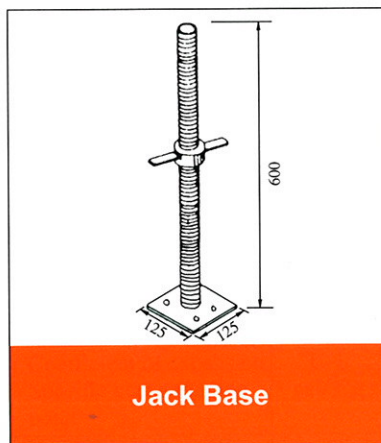


Jack Base

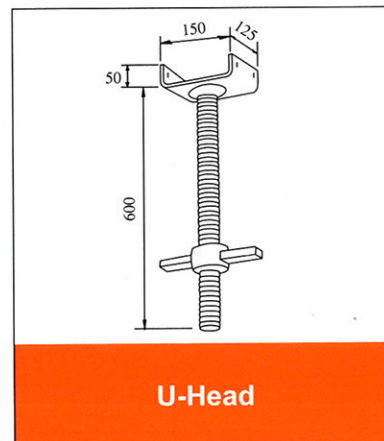


U-Head

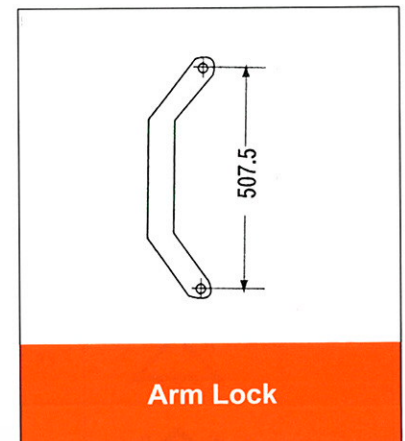


Arm Lock

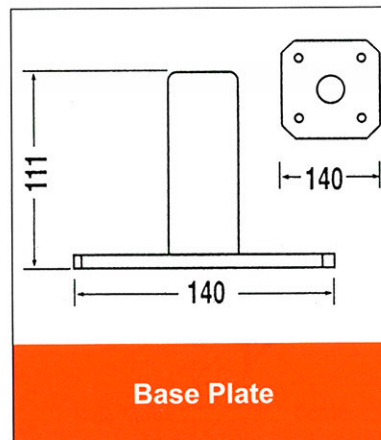


Base Plate

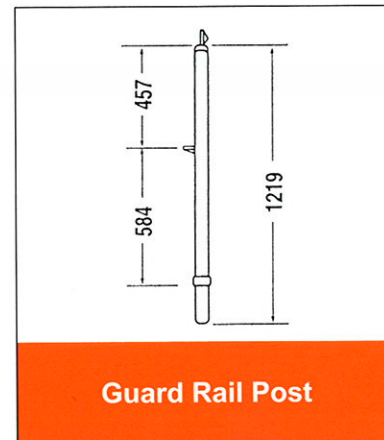


Guard Rail Post

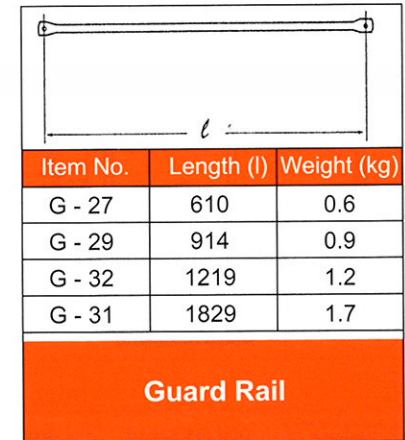


Guard Rail

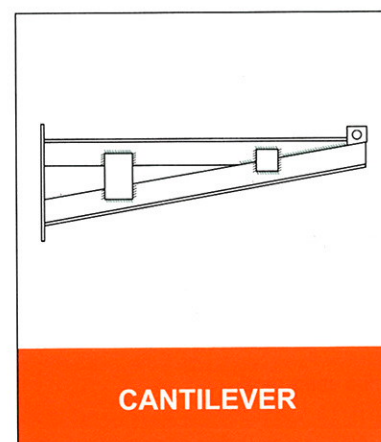

CANTILEVER

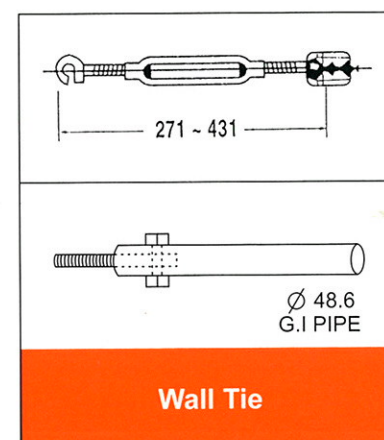


Wall Tie

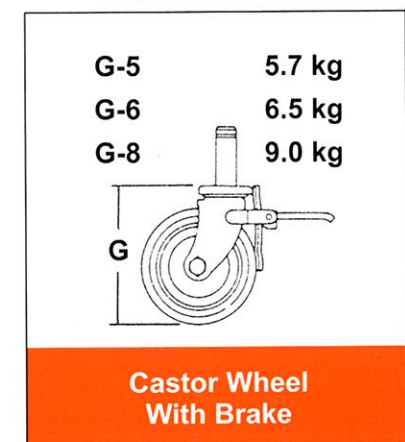


**Castor Wheel
With Brake**

CROSS BRACE

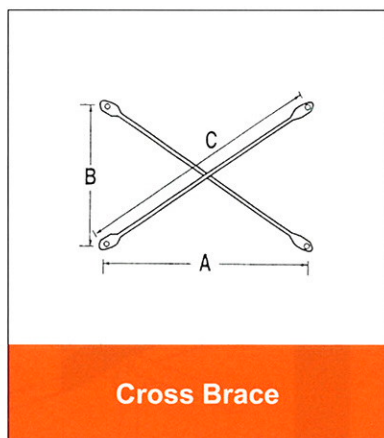







Item No.	A (mm)	B (mm)	C (mm)	Net. Wgt (kg)
G - 14	1829	1219	2198	4.2
G - 11	1524	1219	1952	3.7
G - 13	1219	1219	1724	3.3
G - 19	1829	914	2045	3.9
G - 18	1524	914	1777	3.4
G - 012	1219	914	1524	2.9
G - 08	1829	610	1928	3.7
G - 9	1524	610	1642	3.1
G - 12	1219	610	1363	2.6
G - 09	914	610	1099	2.1
G - 16S	1829	280	1850	3.6
G - 16	1524	280	1549	3.0



TECHNICAL DATA


Strength of frame depends on positions where compressive load is being applied.

Point of load						
Max load per frame p max	10(t)	9.1	7.5	5	3	2.25
Allowable load	5(t)	3.5	3	2	1.2	1

Note: For load point, square pipe material 100 mm x 100 mm is used.

SWIVEL CLAMP


Swivel Clamp
48.6 x 48.6 0.6 kg
Free Size Swivel Clamp
48.6 x 42.7 0.6 kg
Swivel Clamp
48.6 x 60.5 0.75 kg



H BEAM CLAMP



BONE JOINT

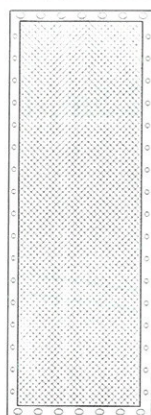

SAFETY NET

FIXED (RIGHT ANGLE) CLAMP

Fixed Clamp
48.6 x 48.6 0.6 kg
Free Size Fixed Clamp
48.6 x 42.7 0.6 kg
Fixed Clamp
48.6 x 60.5 0.75 kg



SAFETY CHAIN & TURN BUCKLE

SCAFFOLDING G.I PIPE (STK 500) DIA. 48.6mm x 2.4mm x 6m

