


VERTICAL STEEL PROP

MODEL NO.	HEIGHT OF USE (APPROX)		PERMISSIBLE LOAD (APPROX)		WEIGHT (APPROX)
	MIN.	MAX.	CLOSED	EXTENDED	
V1	1.8M	3.3M	2,200 KG	1,700 KG	12.14 KG
V2	2.0M	3.5M	2,000 KG	1,500 KG	12.68 KG
V3	2.4M	3.9M	1,900 KG	1,300 KG	13.17 KG
V4	2.7M	4.2M	1,800 KG	1,200 KG	14.59 KG

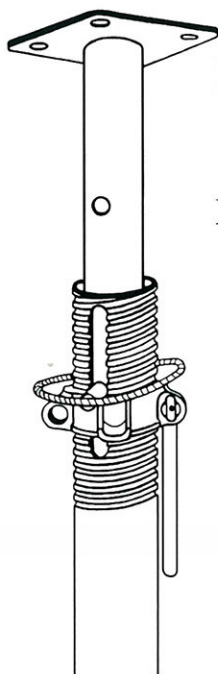

HEAVY DUTY PIPE SUPPORT / PROP

Manufactured with larger tube diameters, making it possible to prop up safely at even greater heights.

- Main Features:**
- Self-cleaning and self-lubricating sphero-chilled cast nut, for better rolling and no risk of seizure between the two elements of the screw;
 - trapezoidal two origins screw-thread, for fast and easy adjustment;
 - raw-adjusting holes always in guide;
 - very low asymmetry between inner and outer tubes.

Model No.	Min (M)	Max (M)	Admitted Load	
			Closed (kg)	Extended (kg)
210/360	2.1	3.6	4000	3100
250/410	2.5	4.1	4000	2700
300/500	3.0	5.0	4000	2250

PUSH PULL PROP (Double Arm)

Model : 600cm

DIA. 60 x 4.0 x 2600 mm
DIA. 70 x 3.6 x 4000 mm
DIA. 48 x 3.6 x 1700 mm
DIA. 57 x 2.5 x 1500 mm

Model : 400cm

DIA. 48 x 3.6 x 2300 mm
DIA. 57 x 2.5 x 2000 mm
DIA. 48 x 3.6 x 1500 mm
DIA. 57 x 2.5 x 1300 mm



DIAGONAL PROP SUPPORT

Single arm prop support with swivel bracket plates at both ends assuring steadiness while pouring concrete

